


SAMPLE NOT FOR CONSTRUCTION

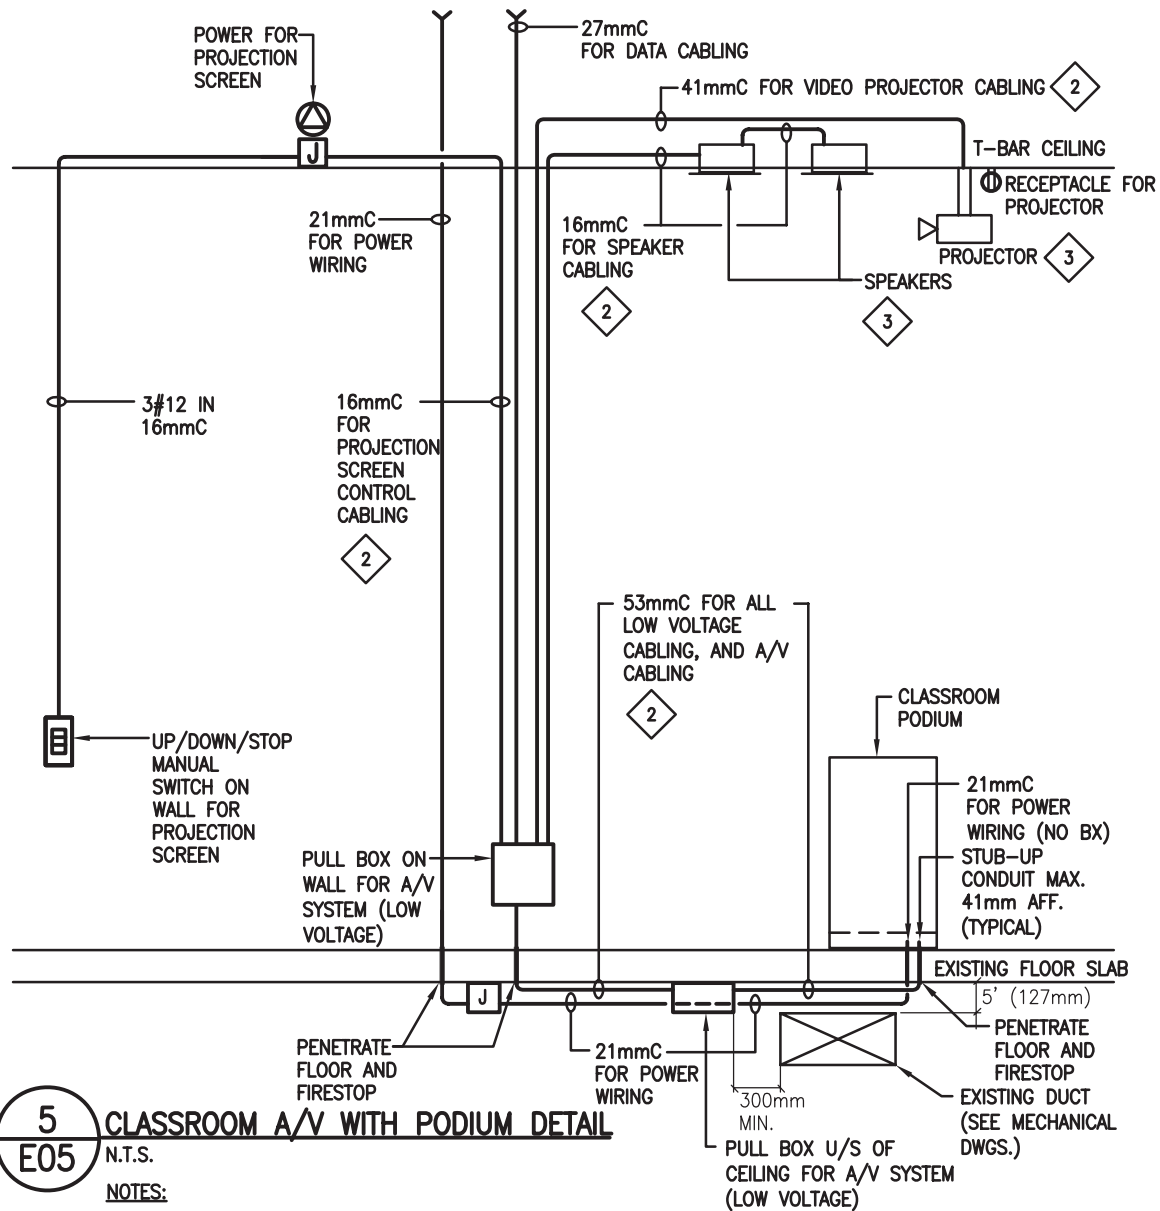

- 1 CONTRACTOR MUST X-RAY OR SCAN EXISTING FLOOR SLAB PRIOR TO CORE DRILL FOR RUNNING CONDUITS IN CEILING SPACE BELOW. COORDINATE WITH U OF T PROJECTOR MANAGER OF SCHEDULING AND APPROVAL PRIOR TO X-RAY THE FLOOR SLAB.
- 2 U OF T WILL SUPPLY A/V CABLES. THIS CONTRACTOR TO INSTALL. COORDINATE WITH U OF T FOR EXACT QUANTITY OF CABLES FOR A C/W SYSTEM.

A/V CABLES:

VGA CABLE FOR PROJECTOR, FT6 INSULATION CAT 5E, AND VIDEO CABLE RG6
STANDARD AUDIO CABLE FOR SPEAKERS 14 GAUGE
3-CONDUCTOR CONTROL CABLE FOR PROJECTION SCREEN 24 GAUGE

- 3 COORDINATE WITH U OF T FOR EXACT LOCATION OF A/V EQUIPMENT PRIOR TO START THE ROUGH-IN WORK.
- 4 SEAL ALL GAPS BETWEEN CONDUIT AND FLOOR SLAB WITH FIRE STOPPER MATERIAL.